


Verso® Type A RCCBs are double pole and designed for all domestic installation. Type A RCCBs are also perfectly suited for currents that may have or DC presence. The Verso® RCBOs are also Type A and have the same qualities.

All Switch Connectors are rated at 100A.

RCCB Devices

Features:


- No. of pole: 1P+N
- Rated voltage: 240V AC
- Rated current: 80-100A
- Rated frequency: 50/60Hz
- Rated short-circuit current: 10000A
- Operating characteristic: AC and A type
- Rated residual operating current: 30mA
- Comply with IEC/EN61008-1, IEC/EN61008-2-1

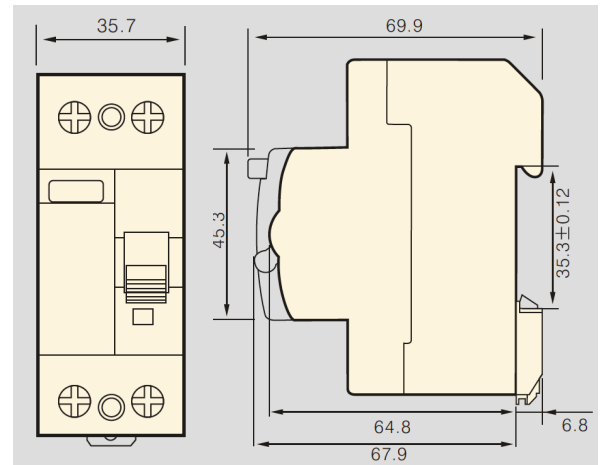

RCBO Devices

Features:

- No. of pole: 1P+N
- Rated voltage: 240V AC
- Rated current: 6-50A
- Rated frequency: 50/60Hz
- Tripping curve: B
- Rated short-circuit current: 6000A
- Operating characteristic: A type
- Rated residual operating current: 30mA
- Comply with IEC/EN61009-1

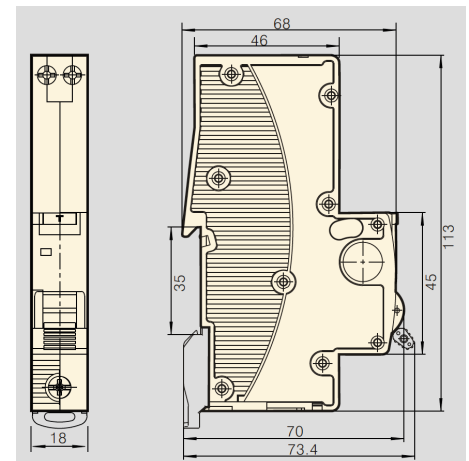

Switch Disconnecter

Features:

- No. of pole: 2P
- Rated voltage: 415V AC
- Rated current: 40-125A
- Rated frequency: 50/60Hz
- Rated insulation voltage: 500V
- Rated impulse withstand voltage: 6kV
- Utilization category: AC 22A
- Comply with IEC/EN 60947-1, IEC/EN 60947-3

